

LAW OFFICES OF  
**Elliott N. Kramsky**

TRANS WORLD BANK BUILDING  
SUITE 400

5850 CANOGA AVENUE

Woodland Hills, California 91367

PATENT, TRADEMARK, COPYRIGHT PRACTICE

TELEPHONE (818) 992-5221

TELEX 6975497 (VIA WUI)

ANSWERBACK 6502909316

TELECOPIER (818) 703-6978

June 24, 1999

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, DC 20231

Re: Docket No. 373-101

Sir:

Submitted herewith for filing is the patent application of Richard A. Jones  
for "Remote Camera Positioner."

Enclosed are:

- (1) Specification and claims;
- (2) Eight (8) sheets of informal drawings;
- (3) Combined Declaration and Power of Attorney; and
- (4) Verified Statement Claiming Small Entity Status-Independent Inventor.

Filing fee calculated as shown below:

For:	No. Filed	No. Extra	Rate	Fee
Basic Fee	XXXXXXXXXXXXXXXXXXXXXXXXXXXX			\$380
Indep. Cls.	1 - 3		\$39	0
Total Cls.	15 - 20		\$ 9	0

Application filing fee..\$380

Total fees.....\$380

"Express Mail" mailing label no. EE316484432US  
Date of Deposit June 24, 1999

I hereby certify that this paper or fee is being  
deposited with the United States Postal Service  
"Express Mail Post Office to Addressee" service  
under 37 CFR 1.10 on the date indicated above  
and is addressed to the Assistant Commissioner  
for Patents, Washington, DC 20231

Elliott N. Kramsky Reg. No. 27,812  
(Typed Name)

(Signature) 

06/24/99  
jc530 U.S. PTO

jc530 U.S. PTO  
09/339430  
06/24/99

6412937 06/24/99

Assistant Commissioner for Patents  
June 24, 1999  
Page 2

A check in the amount of \$380 is enclosed to cover the above calculated fee.

Yours very truly,



Elliott N. Kramsky  
Reg. No. 27,812  
Attorney for Applicant

ENK:cpb  
Enclosures

0044290 0044290

Applicant or Patentee Richard A. Jones

Serial or Patent No.: \_\_\_\_\_ Attorney's Docket No. 373-101

Filed or Issued: \_\_\_\_\_

For: REMOTE CAMERA POSITIONER

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9 (f) AND 1.27 (B)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9 (c) for purposes of paying reduced fees under section 41 (a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled REMOTE CAMERA POSITIONER described in

☒ the specification filed herewith

☐ application serial no. \_\_\_\_\_, filed \_\_\_\_\_

☐ patent no. \_\_\_\_\_, issued \_\_\_\_\_.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9 (c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9 (d) or a nonprofit organization under 37 CFR 1.9 (e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey or license any rights in the invention is listed below:

~~No~~ such person, concern, or organization

☐ persons, concerns or organizations listed below\*

\*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

FULL NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_


☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss or entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 100 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Richard A. Jones

NAME OF INVENTOR

  
Signature of Inventor

Date

6-23-99

TITLE: REMOTE CAMERA POSITIONER

INVENTOR: Richard A. Jones

## BACKGROUND

### Field of the Invention

5           The present invention relates to apparatus for remotely controlling the attitude of a television camera. More particularly, this invention pertains to apparatus suitable for the remote positioning of a film or video  
10 camera in an underwater environment.

### Description of the Prior Art

          Underwater motion imaging, both film and video, is substantially complicated by an inhospitable environment. The pointing or positioning of a camera  
15 underwater is subject to both significant drag and fluid infiltration forces.

          While some attempts have been made to devise apparatus capable of remotely positioning a camera  
underwater, they have been limited to apparatus capable of  
20 dipping a camera housing a few inches beneath the surface, then tilting the lens above the surface. Such apparatus is not completely submersible. A few drops of water in the wrong place can render it inoperable.

As a result, underwater film and video photography presently relies upon the deployment of an underwater cameraman to point an often-bulky camera (75 pounds is not uncommon) manually. Thus, present-day  
5 underwater photography is skilled, labor-intensive and cannot realize the advantages of remote operation, which permits the cameraman to give his complete concentration to the images being captured, that are commonly utilized in above-surface photography.

#### SUMMARY OF THE INVENTION

The present invention addresses the preceding and other shortcomings of the prior art by providing apparatus for remotely controlling the position of a  
15 camera head. Such apparatus includes at least one hydraulically-actuated positioner having an output shaft. The angular displacement of the output shaft is responsive to fluid flow transmitted through a pair of lines coupled thereto. Means are provided for coupling the camera head  
20 to the positioner so that the attitude of the camera head is responsive to angular displacement of the output shaft. A valve is associated with the positioner. The valve is coupled to the pair of lines for controlling fluid flow. A hydraulic unit provides fluid under predetermined  
25 pressure to the valve. Means are provided for selectively energizing the valve to determine the fluid flows.

5 The preceding and other features and advantages  
of the present invention will become further apparent from  
the detailed description that follows. Such description  
as accompanied by a set of drawing figures. Numerals of  
the drawing figures, corresponding to those of the written  
description, point to the various features of the  
invention. Like numerals refer the like features  
throughout both the written description and the drawing  
10 figures.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an overall pictorial view of the  
invention;

15 Figure 2 is an enlarged perspective view of the  
positioning unit of the invention;

Figure 3 is a cross-sectional view of the lower  
positioner of the invention taken at line 3-3 of Figure 2;

20 Figure 4 is a cross-sectional view taken at  
line 4-4 of Figure 3 for illustrating the routing of  
connections of the various electrical cables and hydraulic  
lines;

Figure 5 is a cross-sectional view of the lower positioner taken at line 5-5 of Figure 3 for illustrating the operation of the actuator;

Figure 6 is top planar view of the control console of the invention with top panel removed to facilitate viewing;

Figure 7 is an overall schematic diagram of the electrical and hydraulic circuit elements of the invention;

Figure 8 is a perspective view of an alternative embodiment of the invention wherein the attitude of the camera is adjustable with respect to three axes; and

Figure 9 is a conceptual view of the invention employed for underwater photography while suspended from a ship's boom.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Turning to the drawings, Figure 1 is a perspective view of the overall invention. As shown, the apparatus of the invention is mounted to a mobile

counterbalanced boom 10 of a type that is conventionally employed to position a film or video camera.

The invention comprises a positioning structure 12 engaged to the distal end of the boom 10. Such structure 12 is provided for supporting and pointing a camera (not shown) that is housed within a conventional watertight camera cover 14.

The positioning structure 12 is hydraulically actuated and responsive to both hydraulic and electrical signals that are input at the command of a control unit 16. A hydraulic unit 18 houses apparatus for pumping and storing fluid under pressure.

Referring back to the control unit 16, a video monitor 20 provides the operator with a real time view of the camera output. A control box 22, upon which the monitor 20 is seated, includes hydraulic control wheels 24 and 26 for adjusting the attitude of the camera with respect to vertical ("pan") and horizontal ("tilt") axes, respectively. The front panel 28 of the control box 22 includes a gauge 30 that indicates the hydraulic pressure within the system, an on-off button 32 and manual override button 34. Communication between the hydraulic unit 18 and the control unit 16 is obtained by means of a flexible



hose-like casing 36 that encloses a video cable 38,  
electrical cables (only two of which are visible at 40,  
42), and a hydraulic line 44. The functions responsive to  
the various signals and pressures transmitted by means of  
the casing 18 will become further apparent from the  
discussion that follows. The camera enclosed with the  
cone 14 may be of either the video or film tape. It is  
well-recognized in the art that cameras of both types are  
arranged to provide an output of the camera's field of  
view, suitable for display upon the monitor 20.

Figure 2 is an enlarged perspective view of the  
camera positioning structure 12. As mentioned above, the  
structure 12 is fixed to and supported at the distal end  
44 of the counterbalanced boom 10 by means of a boom  
support 46. It consists of an upper hydraulic positioner  
48 for rotating the attached camera in offered directions  
(indicated by a two-headed arrow 50) about a vertical axis  
52 and a lower hydraulic positioner 54 for rotating the  
attached camera (indicated by a two-headed arrow 56) about  
the tilt axis 58. Each of the positioners 48, 54 is of a  
similar arrangement. The system of the invention employs  
no belts, chains, gears, sprockets, or other devices  
readily subject to damage. It will be seen that, within  
the hydraulic positioners, an actuator is coupled directly  
from an output shaft to a main shaft. In this way, the

threaded main output shaft of the positioner acts as a primary support member as well as a means for attachment to a boom or other structure.

Referring to the upper positioner 48, it is seen to include a mounting plate 60 fixed to the boom support 46. It will be appreciated that the outer body 62 of the positioner 48 is rotatable. In contrast, the corresponding outer body 64 of the lower positioner 54, welded to the lower end 66 of a generally-inclined bracket 68, is fixed in position while an associated mounting plate 70 is rotatable. Also visible in Figure 2 are a nut 72 that secures the mechanism of the upper positioner 48, a connector 74 for receiving an electrical cable 76, and servo valves 78 and 80 associated with the upper and lower positioners 48 and 54 respectively.

Figure 3 is a cross-sectional view of the lower positioner 54 taken at line 3-3 of Figure 2. As mentioned above, the lower positioner 54 is substantially identical to the upper positioner 48, although the mounting plate 60 is fixed to the non-rotatable support structure 46 of the boom 10 while the mounting plate 70 secures the camera. The position of the plate 60 is fixed with respect to the rotatable outer body of the upper positioner 48 while the plate 70 is rotatable with respect to the angularly-fixed

outer body of the lower positioner 54.

Each of the positioners 48 and 54 is hydraulically activated to overcome the resistance force encountered by a submerged camera. By utilizing hydraulic, rather than electric power, to position and reposition the camera remotely within an aquatic environment, the invention is free of failure modes that have characterized electrically-actuated remote camera devices. The strong resistance offered against a submerged camera can result in the overheating and burning of coils and the like. Furthermore, the designs of the positioners 48 and 54 will be seen to incorporate sealing structures for protecting enclosed mechanisms against fluid infiltration. The latter problem may become particularly acute when operating at significant depths.

It will be seen that each positioner is direct drive, driven by a rotary actuator with a one-to-one drive ratio. It would require a much larger electric motor to operate with the same power as a hydraulic motor. In addition, an electric motor would be subject to controllability problems when moving a load from a dead stop. Such a limitation is particularly unsuitable for camera movement where fluidity of movement is essential.

Proceeding from the left-hand side in Figure 3,  
an end plate 82 is fixed to a spacer 84 by means of bolts  
86 and such connection is sealed by means of an o-ring 88.  
The recessed interior of the spacer 84 creates an internal  
5 sealed cavity 90 for receiving hydraulic lines and  
electrical cables for controlling and actuating the  
positioner 54. Such cables and hydraulic lines are not  
shown in Figure 3 for purposes of clarity, but are  
illustrated in the figure that follows. A potentiometer  
10 92 is mounted to a wall 94 of the cavity 90 and fixed to  
an end of a shaft 96 for providing an electrical signal  
indicative of its angular displacement. Displacement of  
the shaft 96 is controlled by means including a rotary  
actuator section 98 thereof. The actuator section 98 is  
15 sealably contained within a cylindrical casing that  
includes a cup-shaped member 100. The member 100 is fixed  
to the spacer 84 by means of bolts 102 and sealed to the  
shaft 96 by an o-ring 104. An end plate 106 is fixed to  
the cup-shaped member 100 by bolts 108 and sealably fixed  
20 to the rotatable shaft 96 by an o-ring 110. The  
cylindrical housing is, in turn, received within a cavity  
112, formed at one end of a cylindrical inner body 114  
that serves as the main output shaft of the positioner.

The generally-cylindrical inner body 114, which  
25 includes a threaded portion 120, receives a tapered collet

116 (secured by bolts 118) at the end opposite the threaded portion 120. The tapered collet 116 eliminates any backlash that may result between the actuator shaft 96 and the rotatable cylindrical inner body 114. It is threaded and engaged to an annular jamb nut 122 for securing it to the surrounding outer body 124 via an abutting rear tapered bearing race 126. Proceeding to the front of the inner body 114, a front tapered bearing race 128 is seated between an inner shoulder of the outer body 64 and an annular shoulder 130 of the body 114. A double-wiper seal 132 prevents leakage between the inner body 114 and the outer body 124. Infiltration through a path adjacent the interior wall of the outer body 124 is prevented by a pair of o-rings 134, 136, while outwardly-projecting wipers 138, 140 of the seal 132 are directed toward the front of the positioner 54 to prevent infiltration adjacent the exterior surface of the rotatable inner body 114.

The seal 132 is of the double-lipped type with sealing wipers directed forwardly in the assembled positioner so that the potentially-infiltrating liquid will itself exert a sealing pressure that acts against the surface of the shaft 114. Such a seal is characterized by a relatively-low coefficient of friction that makes it particularly suitable for oscillation and low r.p.m.

applications.

A Woodruff key 142 fixes the inner body 114 to the shaft 96 for rotation of the inner body 114 is rotatable therewith and relative to the surrounding outer body 124. A stainless steel plug 144 is press-fit within a protruding neck 146 formed of the inner body 114. The exterior of the protruding neck 146 is threaded for receiving a nut (not shown) to secure the mounting plate 70 (also not shown in this figure).

Figure 4 is a cross-sectional view taken on line 4-4 of Figure 3 for illustrating the paths of the various hydraulic and electrical connections to the positioner 54. As mentioned earlier, the various electrical conduits and hydraulic lines are deleted from Figure 3 for purposes of clarity. In general, such elements are received within the cavity 90 formed by the spacer 84. An electrical cable 148, which communicates with the interior of the cavity 90 through a fitting 150, carries a set of three wires 152 to the terminals of the potentiometer 92. As mentioned earlier, the potentiometer 92 provides an electrical output indicative of the angular displacement of the shaft 96. This information is communicated through the wires 152 and the cable 148 to the control unit 16. Hydraulic lines 158 and 160

communicate through fittings 162 and 164, respectively,  
with the interior of the cavity 90 and through fittings  
166 and 168. Such fittings 166, 168 penetrate the end  
wall 94 of the spacer 84 to provide access to chambers  
within the casing of the actuator. The angular position  
of the shaft 96 is hydraulically controlled by the filling  
and emptying of such chambers, discussed below.

Figure 5 is a cross-sectional view of the lower  
positioner taken at line 5-5 of Figure 3 for illustrating  
the operation of the actuator. As can be seen, the shaft  
section 98 includes a single radial fin 172 that projects  
toward the inner surface of the cup-shaped member 100. An  
elastomeric wiper 174 is seated within an internal  
longitudinal groove that projects the length of the shaft  
section 98 to contact the inner surface of the cup-shaped  
member 100. An inwardly-protruding pedestal 176 of the  
member 100 includes an arcuate top surface for contacting  
the cylindrical central sleeve 170. In combination, the  
wiper 174 and the pedestal 176, which includes an  
elongated central seal 177 of, for example, TEFLON, define  
separate chambers 178 and 180 within the interior of the  
cup-shaped body 100. Apertures 182 and 184 within the end  
wall of the cup-shaped body 100 (aligned with the fittings  
168 and 166 within the mating end wall 94 of the spacer  
84) provide inlet ports for controlled flows of hydraulic

end wall 94 of the spacer 84) provide inlet ports for controlled flows of hydraulic fluid that selectively effectuate clockwise and counter-clockwise actuator 98 rotations and corresponding rotations of the shaft 96.

5                   Figure 6 is a top planar view of the control box 22 of the invention with top panel removed to facilitate viewing. The box 22 provides the camera operator, viewing the video monitor 20, with a means for inputting signals for responsively controlling the  
10 position of the camera 14. As mentioned earlier, control wheels 24 and 26, which may be grasped at handles 186 and 188 respectively, are fixed to shafts 190 and 192 that protrude within the box 22 as shown. Angular  
15 displacements of the shafts 190 and 192 are smoothed by the inertia provided by flywheels 194 and 196 respectively.

Potentiometers 198 and 200 at the ends of the shafts 190 and 192 generate electrical signals in response to rotation of the control wheels 24 and 26. Such signals  
20 serve as inputs that are applied to circuit boards 202 and 204, each of which includes an integrated circuit controller of the type marketed by H.R. Textron under Model No. EC250GP. Such a device is a single channel servo control card for driving servo valves in a closed-



loop hydraulic or pneumatic position control system and is equipped with provisions for feedback from two different sensors, such as a position sensor and a force sensor. Such a card may be appropriately configured by one skilled  
5 in the art to perform the functions necessitated by the operation of the system herein and with particular reference to the discussion that accompanies Figure 7 below.

Ports 206, 208 and 210 admit electrical conduit  
10 that communicate signals between the box 22 and external transducers, potentiometers and servo valves. A port 212 receives a hydraulic line 214 that originates at an accumulator (discussed below). Such hydraulic input is applied to the rear of the pressure gauge 30 to allow the  
15 camera operator to ascertain the pressure within the system. A manual override input allows the operator to adjust appropriate parameters (e.g. gain) of the integrated controller circuits of the circuit boards 202 and 204 to vary the responsiveness of the system to  
20 operator input (via the control wheels 24 and 26).

Figure 7 is an overall schematic diagram of the invention. The various elements of the hydro-electromechanical system cooperate to enable the camera operator to control the attitude of the camera from a

remote location with respect to the pan and tilt axes 52 and 54. The hydraulic powered movements enable the apparatus to overcome underwater resistance forces without an overheating of electrical elements. From the discussion of the prior figure, electronics mounted upon printed circuit boards 202 and 204 receive, among other inputs, electrical signals (provided by potentiometers 198 and 200) responsive to the angular positions of the control handles 24 and 26. Other inputs to the electronics mounted upon the boards 202 and 204 will be disclosed below. The various elements of the system enable a camera to be positioned in a smoothly controllable manner, despite the presence of strong underwater resistance forces. Such smooth positioning of the camera is essential to the generation of high-quality film and video images.

The hydraulic unit 18 provides a pressurized output of hydraulic fluid for driving the positioners 48 and 54. Such unit 18 includes an accumulator 216 for maintaining constant system pressure which receives hydraulic fluid under pressure from a pump 218 that is supplied by a reservoir 220. The reservoir 220 receives unpressurized hydraulic fluid, through a return line 224, from the valves 78 and 80. As mentioned earlier, the output (pressure) from the accumulator 216 is monitored by

the camera operator through observation of the gauge 30 of the control box 22. A pressure switch 222 taps the accumulator output line 214 and, in response to changes in the monitored pressure, generates an electrical signal for  
5 adjusting the operating pressure range of the pump 218 accordingly. Thus, the pump 218, the accumulator 216, and the pressure switch 222 form, in combination, a closed-loop system for regulating system pressure.

10 The pressurized hydraulic fluid is directed to servo valves 78 and 80 associated with the positioners 48 and 54 respectively. As mentioned earlier, each valve and associated positioner is mounted to the distal end 46 of the boom 10. The servo valves 78 and 80 are each coupled to paired output lines for feeding (and draining) interior  
15 chambers of its associated rotary actuator as is illustrated in Figure 5. It is such valve-directed filling and draining of the paired chambers that generates the hydraulic force for applying torque to the shaft of the positioner. Lines from the servo valves 78 and 80 are  
20 coupled to the return line 224. Such lines transport fluid from chambers to the side of the radial actuator fin from where fluid is being drained during actuator shaft rotation.

The actuator chambers of the positioner 54 are fed by the servo valve 80 through the hydraulic lines 158 and 160 while those of the actuator of the positioner 48 are fed by the servo valve 78 through hydraulic lines 228 and 230. The outputs of the valves 80 and 78 are applied to differential transducers 232 and 234 that provide electrical signals to the control box 22 through conductors 236 and 238 respectively. Such signals comprise additional inputs to the single channel control cards of the circuit boards 202 and 204. Qualitatively, these inputs are employed by the pressure loop of the device to regulate system pressure and thereby smooth the positioning movements of the camera. The outputs of the transducers 232 and 234 indicate the magnitude of the difference between the opposed forces that act within the chambers of the rotary actuators. A differential that exceeds a predetermined value will produce either jerky camera movements or locking of the main shaft of the positioner. Upon detection of such an unacceptably-large differential, the single channel control card will generate appropriate signals (transmitted to the servo valves 78 and 80 through the conductors 240 and 242 respectively) to reduce the pressure differential. This will slow the rate of rotation of the positioner shaft, but does not limit the degree of angular displacement. Compliant operation is triggered when an extremely high

pressure differential is detected.

5 The electrical conductors 244 and 246 transmit the angular displacements of the rotary actuator and main shafts of the positioners (taken from the potentiometers mounted thereto), to the control cards within the control box 22. Such signals are applied to the position loop of the card (along with signals from the potentiometers 198 and 200 that are responsive to the angular positioners of the control wheels 24 and 26). In the event that a  
10 discrepancy is detected between the signals representing desired (i.e. control wheel) and actual (i.e. main and rotary actuator shaft positioners) angular positions of the shafts, appropriate corrective signals will be sent to the servo valves 78 and 80 through the conductors 240 and  
15 242.

Figure 8 is a perspective view of an alternative embodiment of the invention, wherein the attitude of a camera 248 is adjustable with respect to three, rather than two, axes. Comparing the arrangement  
20 of Figure 8 to the prior embodiment (wherein like numerals refer to corresponding elements of the prior embodiment), a third positioner 250 is fixed, by means of an L-shaped bracket 254, to the positioner 54 for pointing the camera 248 with respect to the tilt axis 58. As before, the

positioner 54 is coupled, by means of a bracket 68, to the positioner 48 for pointing the camera 248 with respect to the pan axis 52. The positioner 250 is substantially identical to each of the positioners 48 and 54 discussed above. (Cabling has been removed from Figure 8 for purposes of clarity.) A mounting plate 256 is rotatable with respect to its fixed outer body 258. The mounting plate 256, in turn, is fixed to a camera holder 260. Although not illustrated in Figure 8, the camera 248 will, of course, be mounted within a watertight cover for underwater use.

In essence, the arrangement of Figure 8 more-or-less mimics the action of an arm providing three degrees of rotational freedom. Thus, the camera 48 can be controllably rotated with respect to the pan axis 52, rotated with respect to the tilt axis 58, and rotated with respect to the roll axis 252. The mechanisms for accommodating the third degree of freedom offered by the invention are obtained through straightforward extension of the teachings pertaining to the prior embodiment and such adaptations will be apparent to those skilled in the art. It is to be noted that other arrangements than those illustrated in Figure 8 may be provided for a three degrees of rotational movement apparatus. It is not necessary that the pan positioner 48, the tilt positioner

54, and roll positioner 50 be arranged in the particular relationship as illustrated. Rather, it is only necessary that a structure incorporating, for example, brackets as illustrated in Figure 8, be provided with rotatable platforms that are sequentially coupled to provide, at some point, a resultant platform for mounting a camera that is responsive to rotation about each of the three chosen axes.

Figure 9 is a conceptual view of the invention employed for underwater photography while suspended from a ship's boom 262. The camera 264 may be aimed by means of the pan positioner 48 and the tilt positioner 54 in like manner to that described with reference to a mechanism suspended from a conventional camera boom. Like applications may be envisioned including, for example, the use of the apparatus of the invention for aiming a camera suspended within a deep shaft.

Thus, it is seen that the present invention provides apparatus for positioning a camera within an underwater environment. By utilizing the teachings of this invention, one may remotely control and position a camera underwater. The internal design of the positioners of the invention makes the device self-sealing to eliminate any need for bulky structures to prevent fluid

infiltration. As illustrated, this invention is suitable for use in a number of environments and subject to a number of deployments.

5 The positioner is a sealed unit impervious to dust, water, mud, and hazardous chemicals, permitting the apparatus to be employed in a hazardous environment. Unlike machines that lack a hydraulic drive, the present invention is suitable for overcoming external forces, such as the high friction of water or a windstorm. Unlike  
10 prior art apparatus that is not waterproof, by employing apparatus in accordance with the invention, the camera operator is not limited to use of the device in favorable environments. Rather, unlike relatively-delicate devices, one may employ this apparatus in close proximity to an  
15 explosion. A camera operator could begin a scene in the water (e.g. thirty feet below the surface) and boom the camera out of the water while maintaining control of the camera both in and out of the water.

20 While this invention has been described with reference to its presently-preferred embodiment, it is not limited thereto. Rather, this invention is limited only insofar as it is defined by the following set of patent claims and includes within its scope all equivalents thereof.



What is claimed is:

1                   1.     Apparatus for remotely controlling the  
2     position of a camera head, said apparatus comprising, in  
3     combination:

4                   a) at least one hydraulically-actuated  
5     positioner having an output shaft;

6                   b) the angular displacement of said shaft  
7     being responsive to fluid flows transmitted through a pair  
8     of lines coupled thereto;

9                   c) means for coupling said camera head to  
10    said at least one positioner so that the attitude of said  
11    camera head is responsive to the angular displacement of  
12    said output shaft;

13                  d) a valve associated with said  
14    positioner, said valve being coupled to said pair of lines  
15    for controlling said fluid flows;

16                  e) a hydraulic unit for providing fluid  
17    under predetermined pressure to said valve; and

18                  f) means for selectively energizing said  
19    valve to determine said fluid flows.

1                   2.     Apparatus as defined in Claim 1 wherein  
2     said at least one positioner further includes:

3                   a) a rotational actuator having an  
4     actuator shaft;

5                   b) the angular displacement of said  
6     actuator shaft being directly responsive to said fluid  
7     flows;

8                   c) a generally-cylindrical inner housing,  
9     said inner housing having an internal cavity for  
10    accommodating said rotational actuator;

11                  d) the axis of symmetry of said  
12    generally-cylindrical inner housing being coincident with  
13    that of said actuator shaft;

14                  e) said inner housing including a  
15    cylindrical main shaft position of reduced diameter at one  
16    end thereof;

17                  f) means for fixing said actuator shaft  
18    to said inner housing whereby rotation of said inner  
19    housing generates corresponding rotation of said main  
20    shaft.

1                   3.     Apparatus as defined in Claim 2 wherein  
2     said at least one positioner further includes:  
3                   a) a generally-cylindrical outer housing;  
4                   b) said generally-cylindrical outer  
5     housing having a hollow interior for accommodating said  
6     inner housing; and  
7                   c) means for rotatably coupling said  
8     inner housing to said outer housing.

1                   4.     Apparatus as defined in Claim 2 wherein  
2     said rotational actuator further includes:  
3                   a) a substantially-hollow cylindrical  
4     body with an axially-elongated pedestal protruding  
5     inwardly and contacting a section of said actuator shaft;  
6                   b) said section of said actuator shaft  
7     having an axially-elongated radially-directed fin  
8     extending to the inner surface of said substantially-  
9     hollow cylindrical body whereby the interior of said  
10    cylindrical body comprises two chambers;  
11                  c) a wall at one end of said rotational  
12    actuator having two apertures, each of said apertures  
13    being in communication with one of said chambers; and  
14                  d) one of said lines being in  
15    communication with one of said apertures and the other  
16    line being in communication with the other of said  
17    apertures.

1                   5.     Apparatus as defined in Claim 2 wherein  
2     said cylindrical neck is exteriorly-threaded.

1                   6.     Apparatus as defined in Claim 3 further  
2     including a contacting annular seal between the interior  
3     of said outer housing and the exterior of said inner  
4     housing.

1                   7.     Apparatus as defined in Claim 6 wherein  
2     said seal further includes:

3                         a) a pair of outwardly-directed wipers;  
4     and

5                         b) said wipers are axially aligned  
6     adjacent said outer surface of said inner housing.

1                   8.     Apparatus as defined in Claim 3 further  
2     including a pair of contacting, axially-aligned annular  
3     bearing races between the interior of said outer housing  
4     and the exterior of said inner housing.

1                   9.     Apparatus as defined in Claim 8 wherein  
2     each of said bearing races houses a tapered bearing.

1                   10.   Apparatus as defined in Claim 2 wherein  
2   said means for fixing said actuator shaft to said inner  
3   housing further comprises:

- 4                   a) a tapered collet, said collet  
5   surrounding and being coaxial with said actuator shaft;  
6                   b) means for fixing said collet to said  
7   inner housing; and  
8                   c) means for fixing said tapered collet  
9   to said actuator shaft.

1                   11.   Apparatus as defined in Claim 10 wherein  
2   said means for fixing said tapered collet to said actuator  
3   shaft comprises an inwardly-directed key extending from  
4   the interior of said collet to a groove within the  
5   exterior of said actuator shaft.

1                   12.   Apparatus as defined in Claim 2 further  
2   including:

- 3                   a) the interior of said main shaft  
4   position being substantially hollow;  
5                   b) a substantially-cylindrical plug, said  
6   plug being received within said hollow interior of said  
7   main shaft; and  
8                   c) means for sealing said plug to said  
9   main shaft.

1                   13.    Apparatus as defined in Claim 12 wherein  
2   said means for sealing comprises:

- 3                   a) an o-ring; and
- 4                   b) said o-ring being received within an
- 5   annular groove within the outer surface of said plug.

1                   14.    Apparatus as defined in Claim 5 further  
2   including:


- 3                   a) a mounting structure;
- 4                   b) said mounting structure including a
- 5   substantially-planar plate having an internal aperture for
- 6   accommodating said cylindrical main shaft; and
- 7                   c) an interiorly-threaded nut for
- 8   securing said plate to said main shaft whereby said
- 9   mounting structure is rotatable with said main shaft.

1                   15.    Apparatus as defined in Claim 14 further  
2   including:

- 3                   a) two positioners;
- 4                   b) an inclined bracket, the ends of said
- 5   bracket being fixed to the outer housings of said
- 6   positioners; and
- 7                   c) the mounting structure of one of said
- 8   positioners being fixed to said camera head and the
- 9   mounting structure of the other positioner being fixed to
- 10   a camera support structure.

# ABSTRACT

Apparatus for remotely controlling the positioner of a camera head. At least one hydraulically-actuated positioner for rotating the camera head with respect to an axis is fixed to the camera head and to a camera support device, such as a camera boom. The positioner includes an output shaft whose angular displacement is responsive to fluid flows transmitted through a pair of associated hydraulic lines . A valve is associated with each positioner and controls the flow of fluid within the pair of positioner hydraulic lines. A control unit receives and processes inputs provided by a camera operator (observing the camera's field-of-view on a monitor) and outputs generated by the system so that the necessary adjustments may be controlled by the valves to assume smooth camera movements in either an aquatic environment or otherwise.

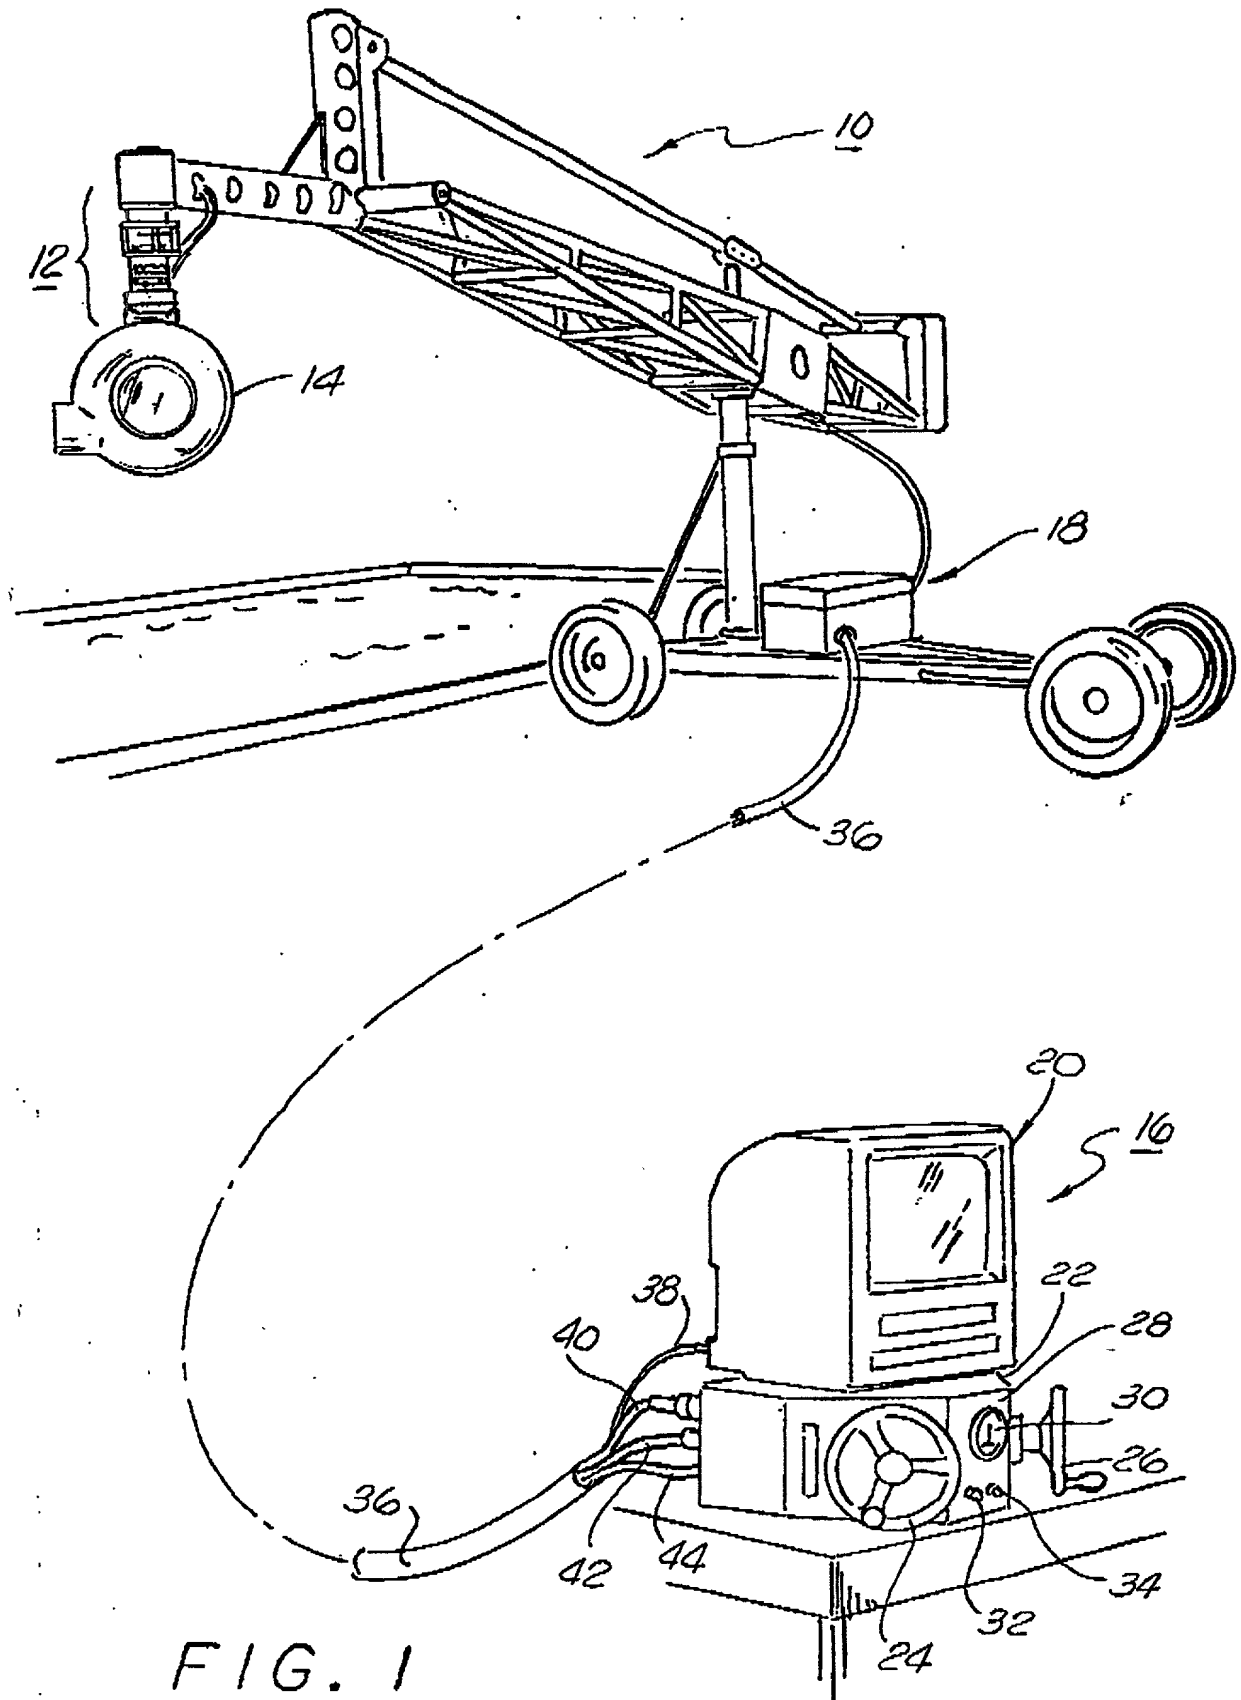

661290"02468680



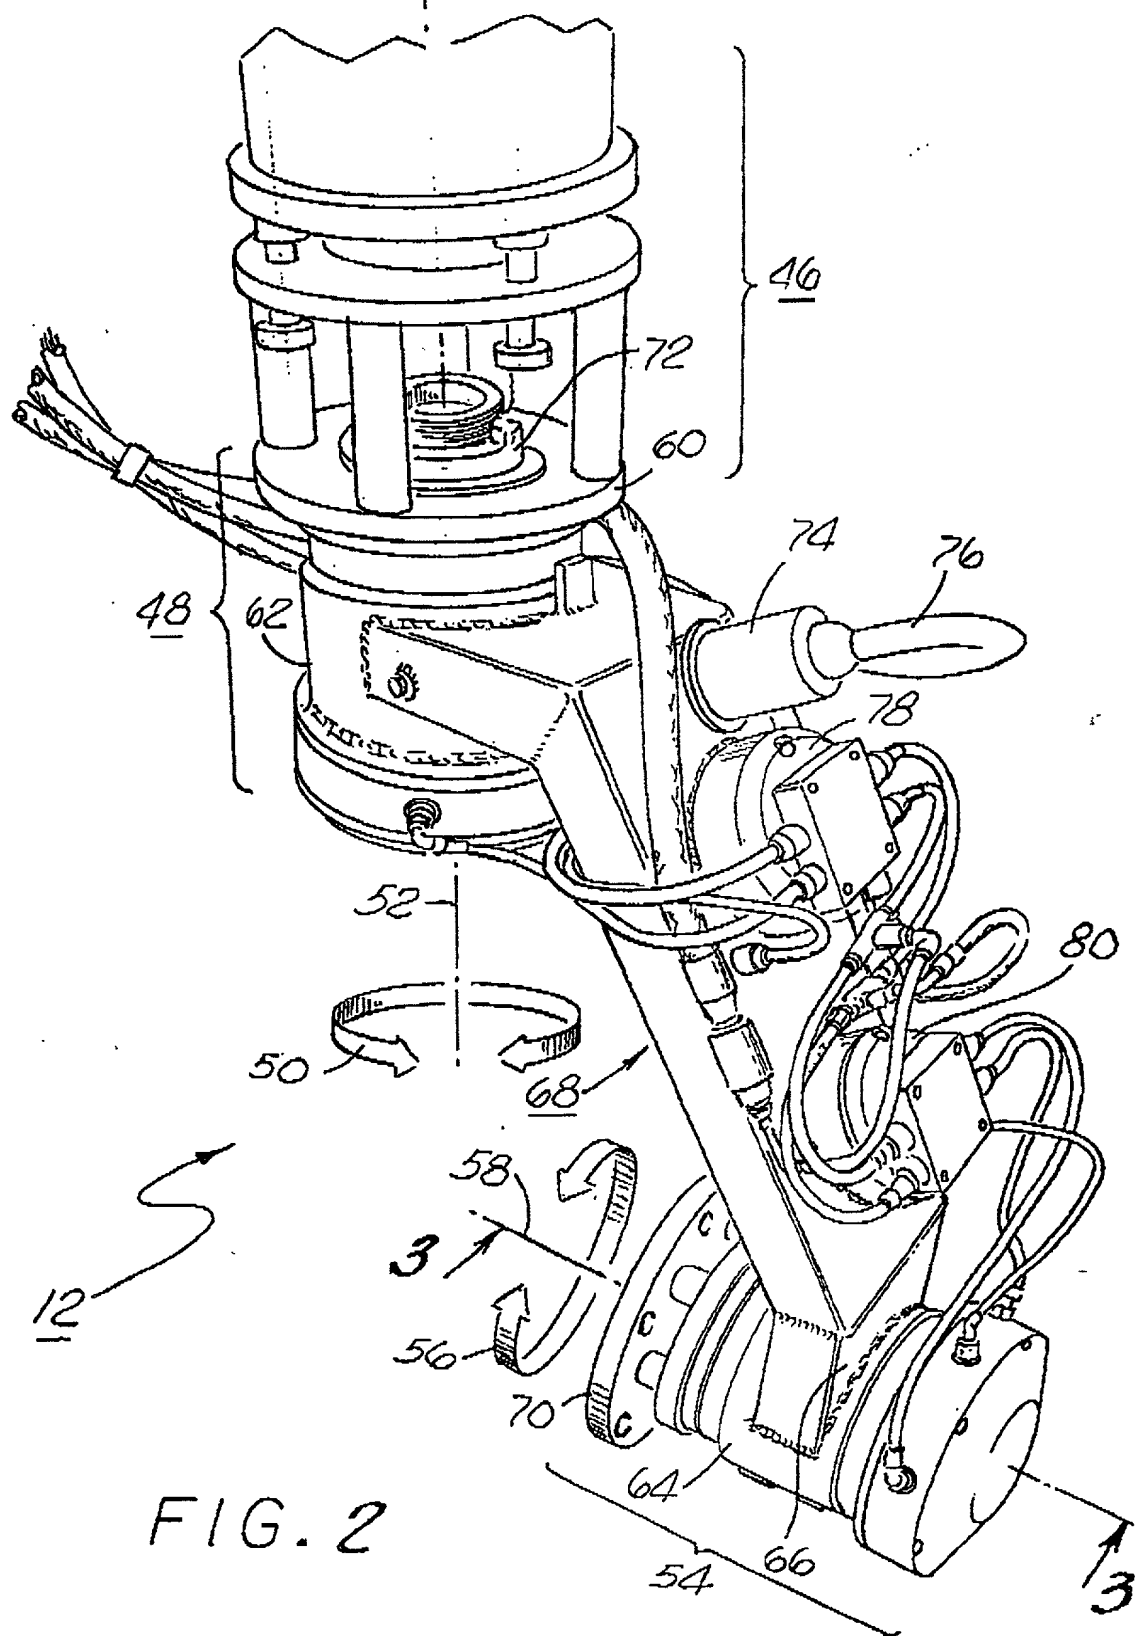
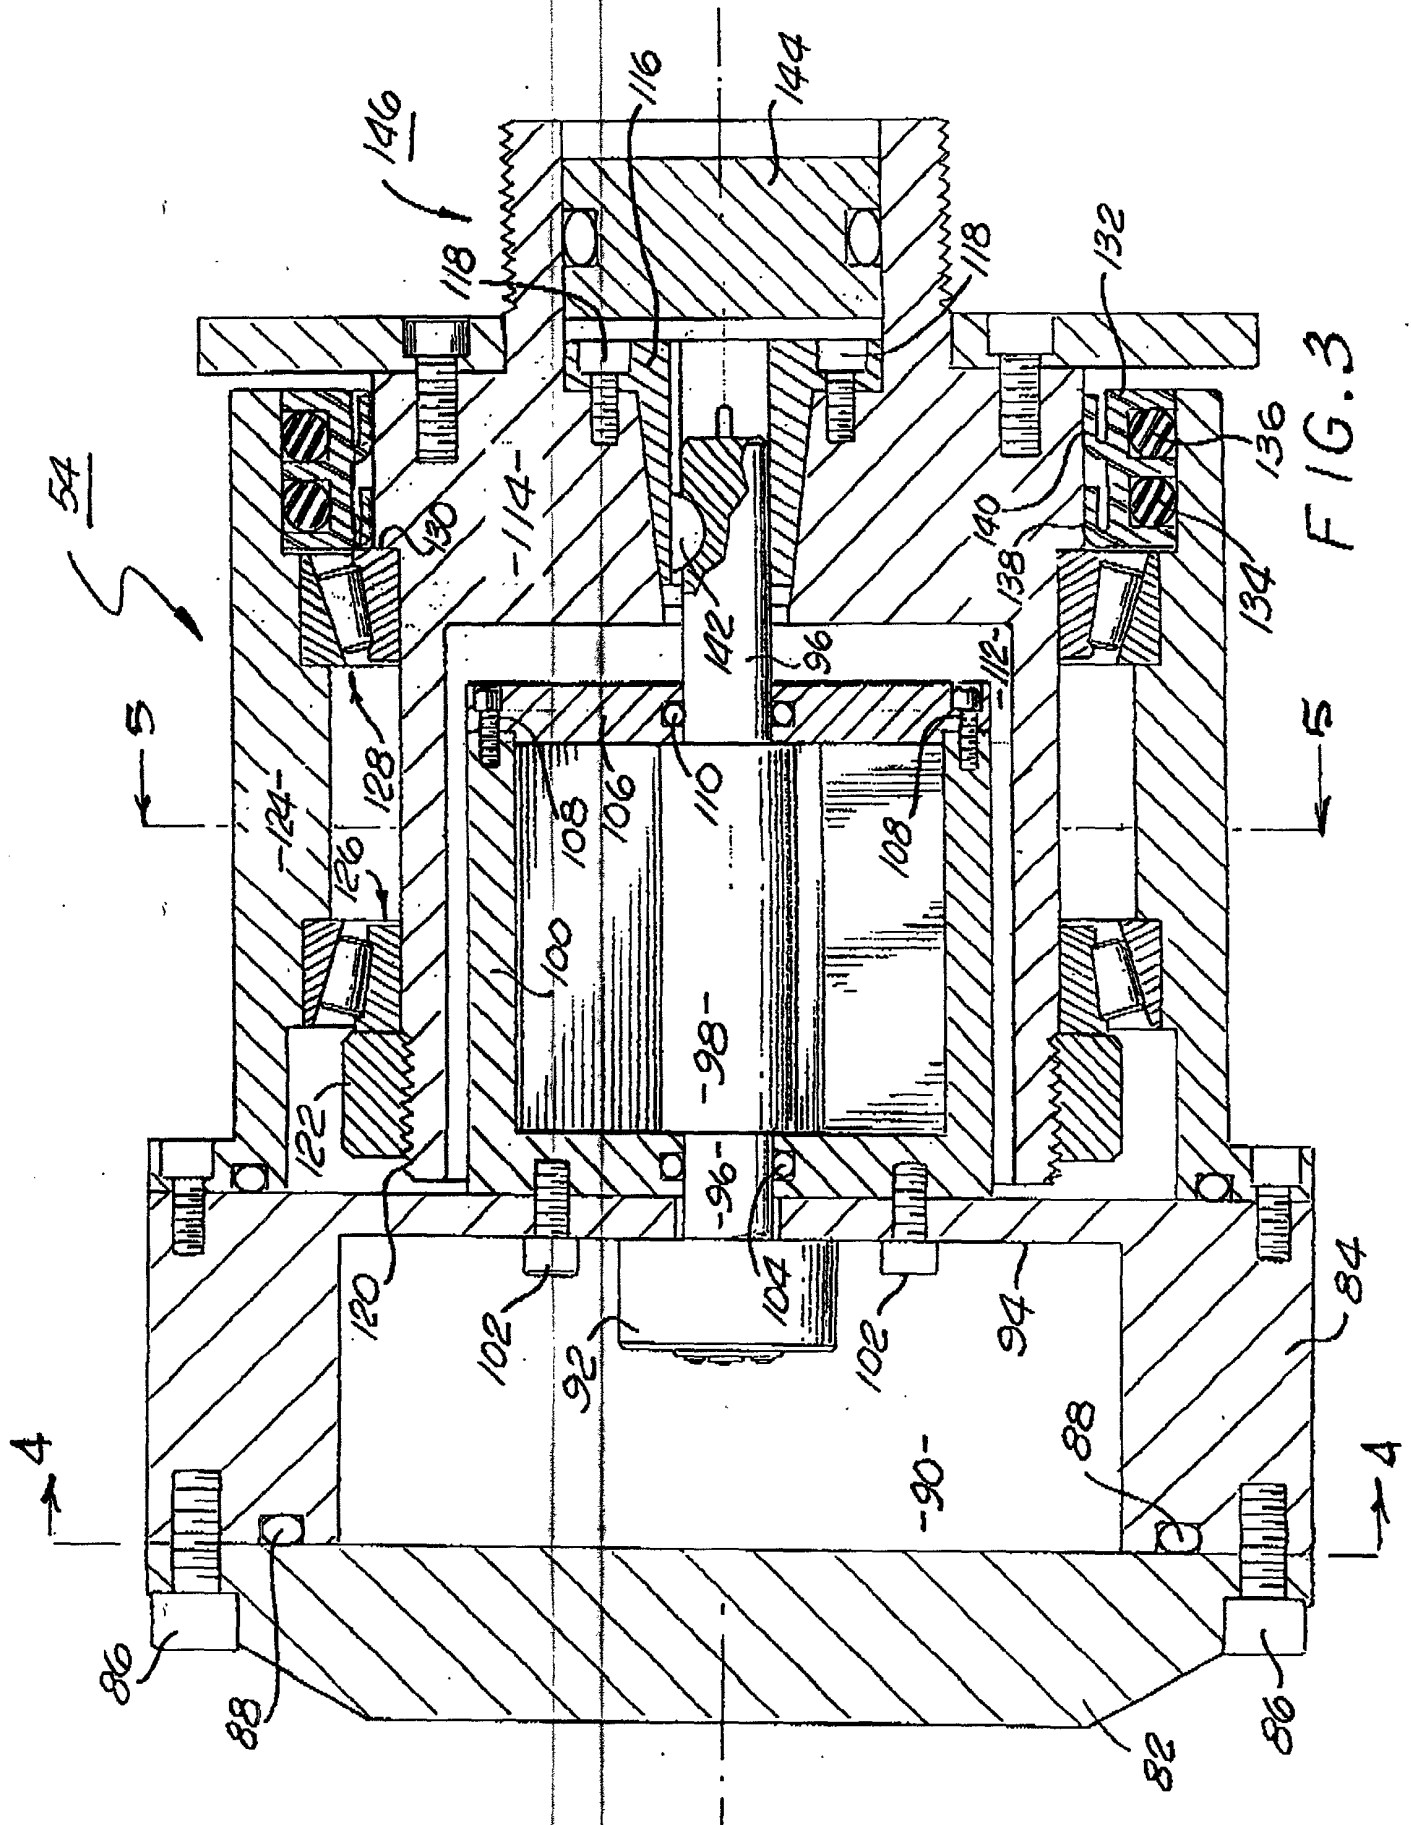


FIG. 2

664290 "DETECTED"



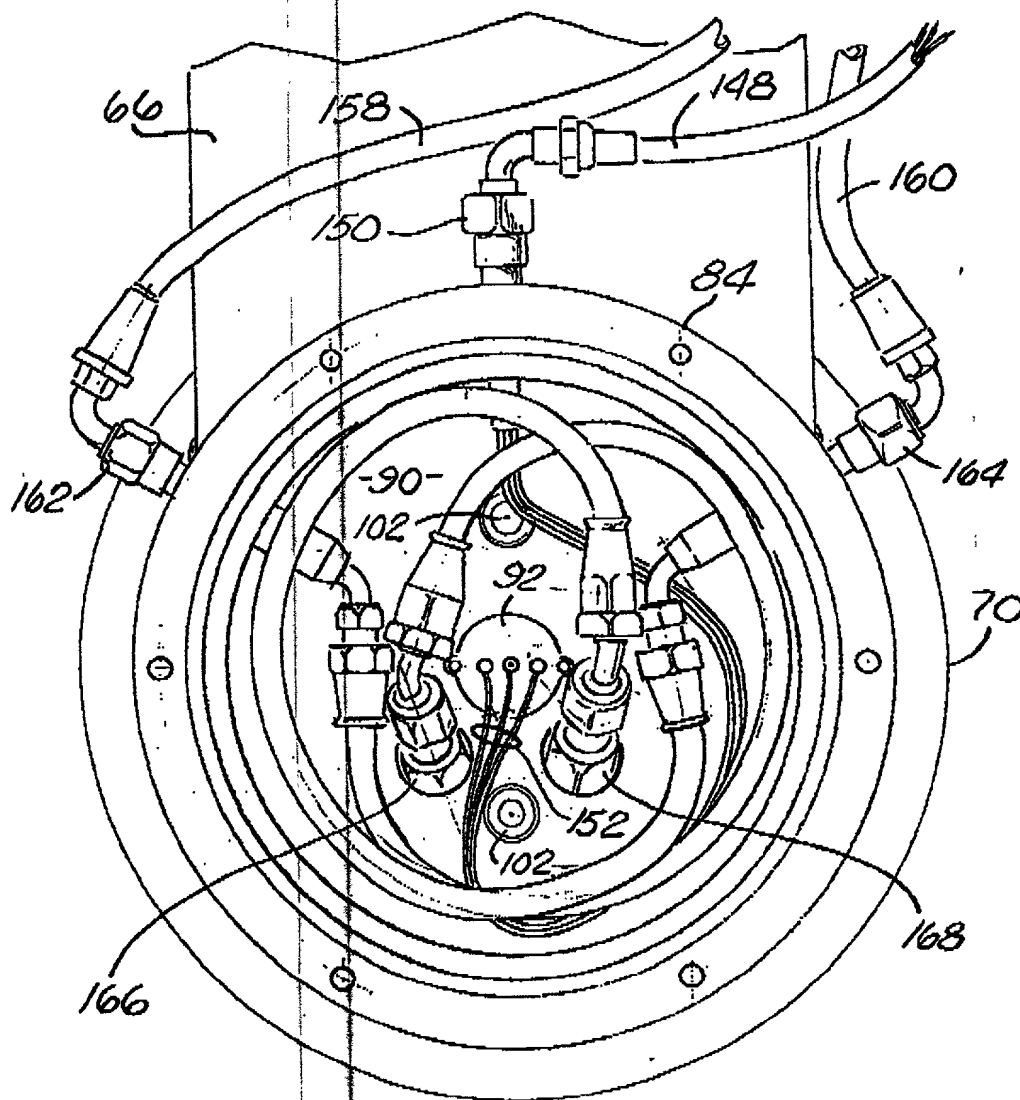


FIG. 4

654290\* 02165560

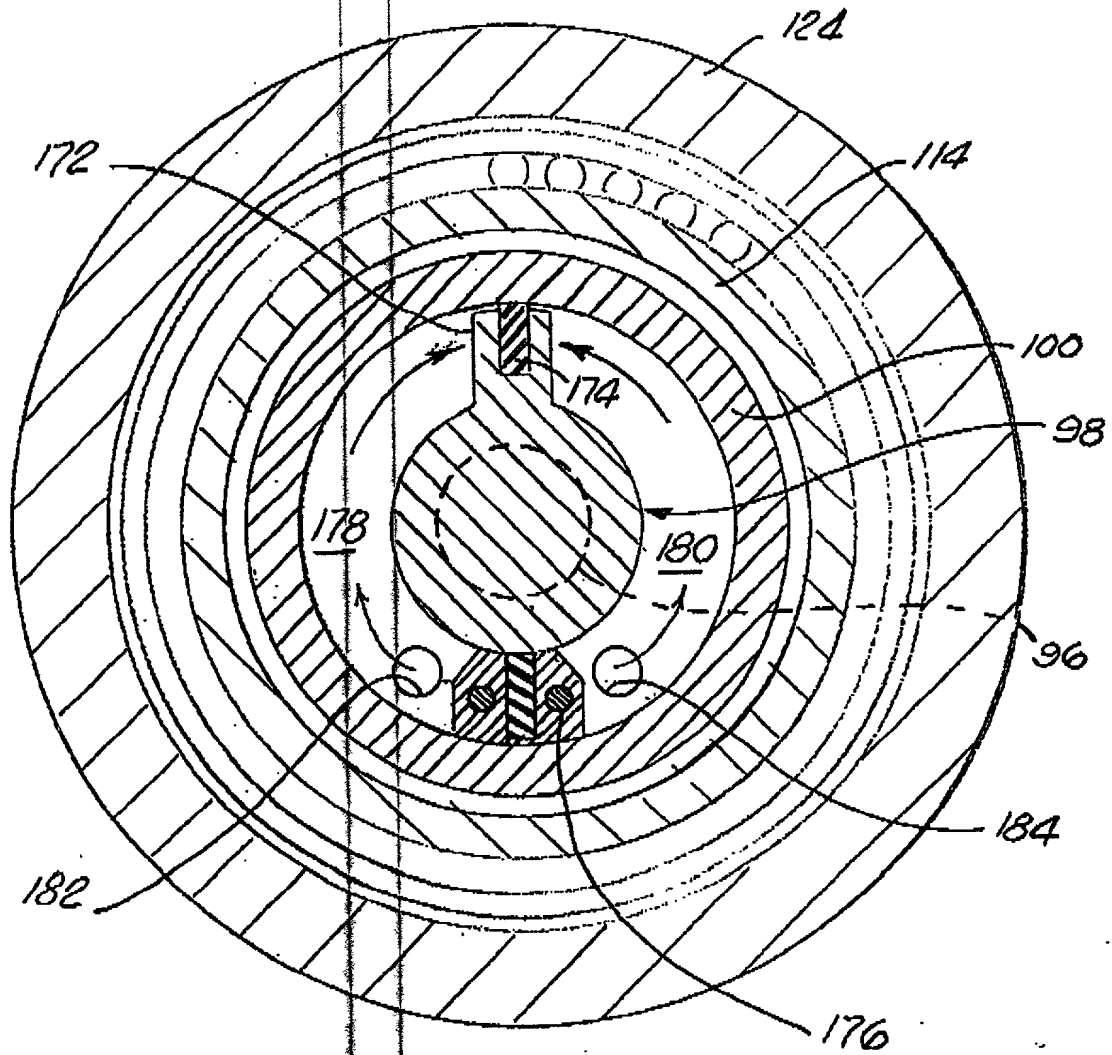
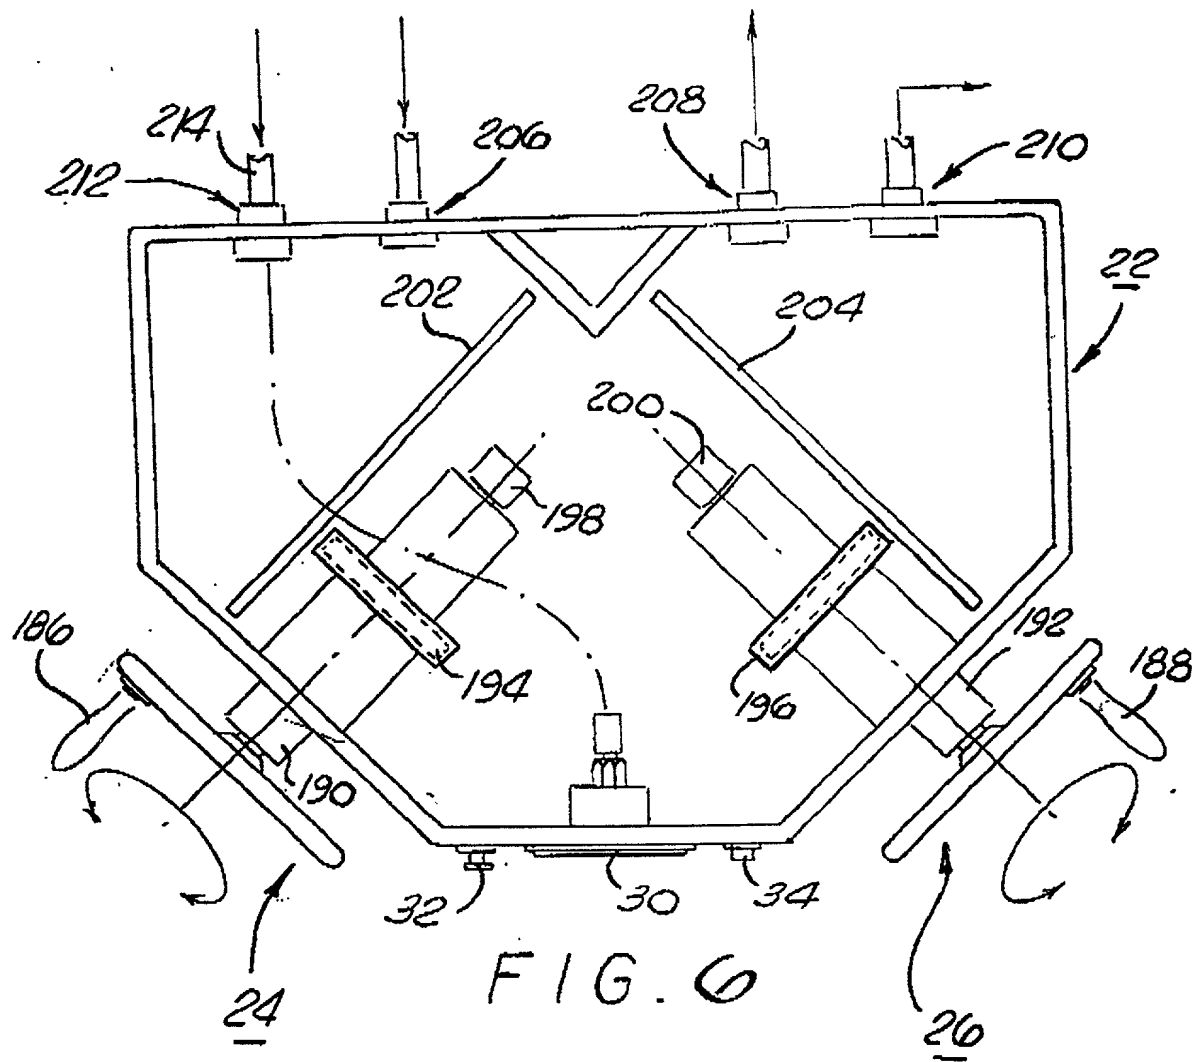


FIG. 5



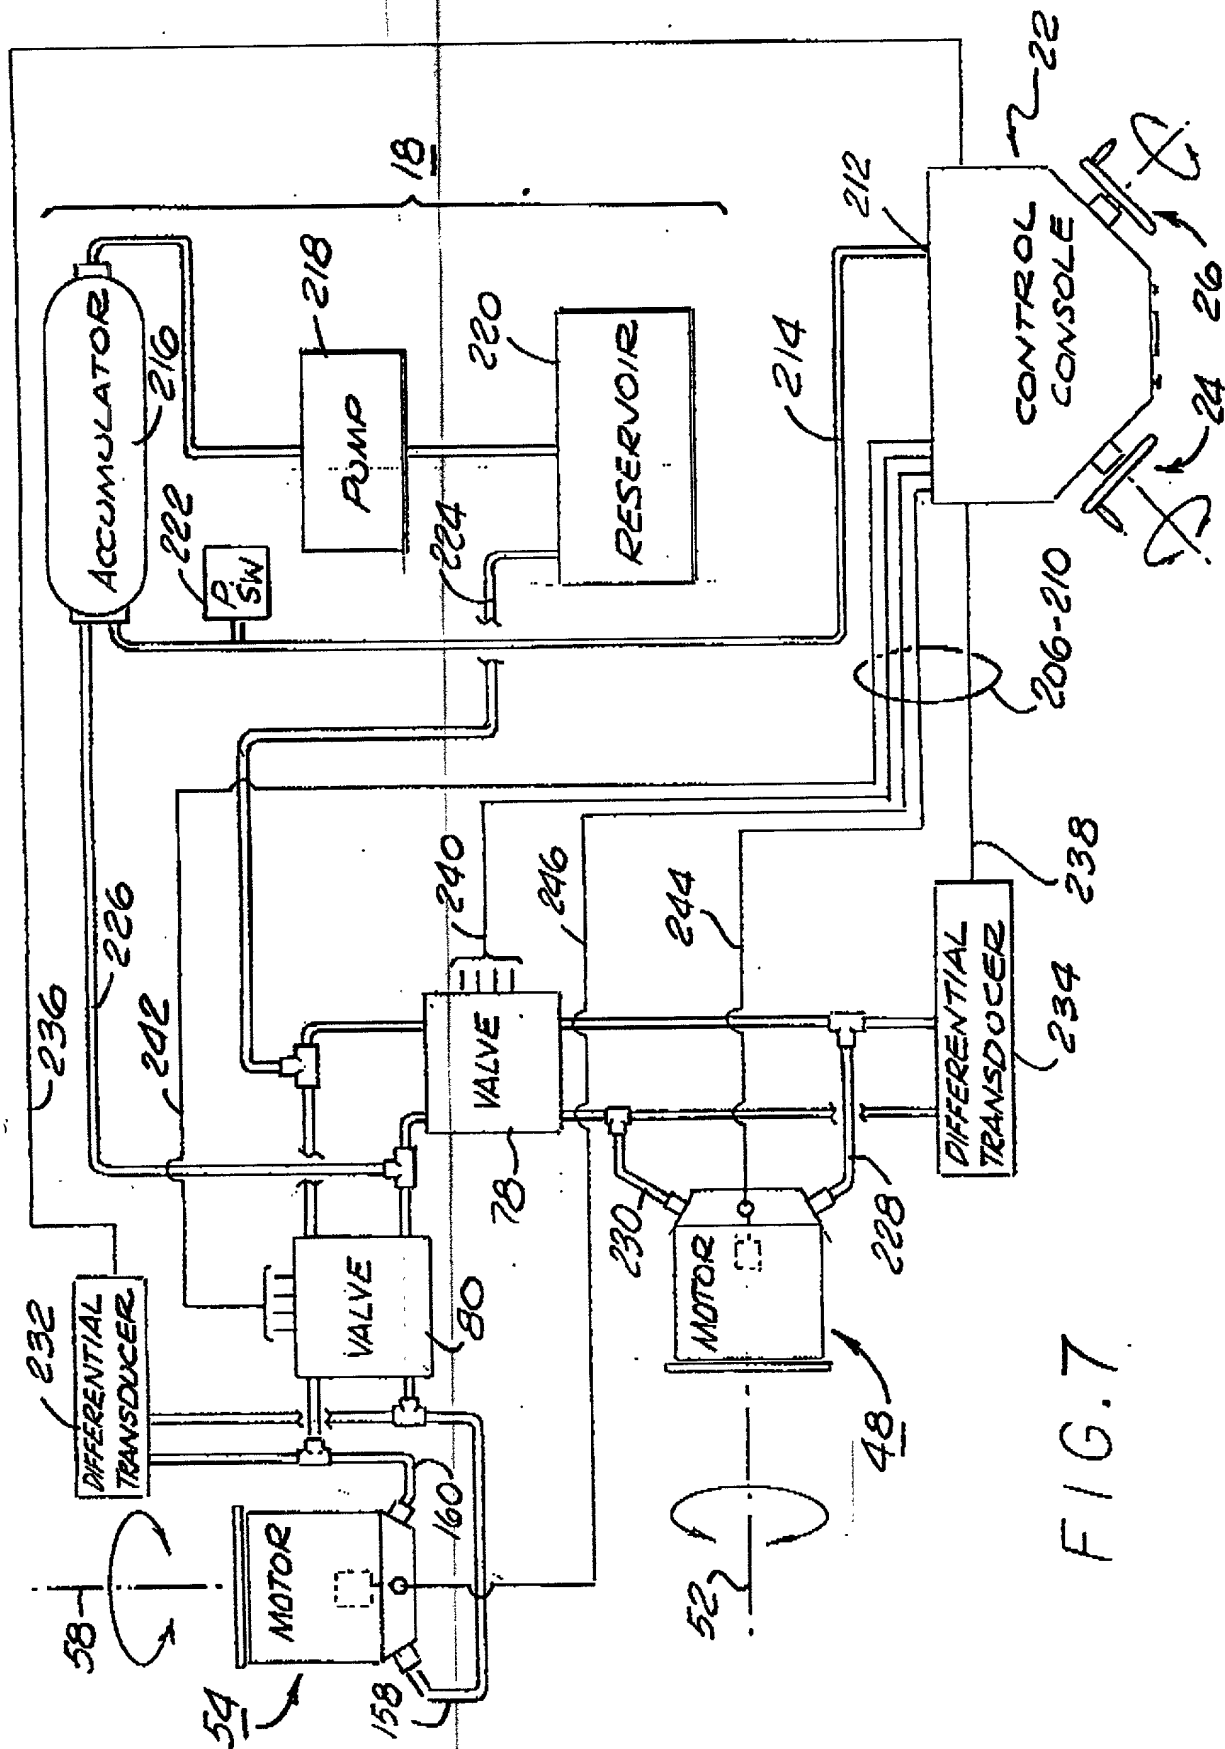


FIG. 7

664290" DET46EE60

FIG.8


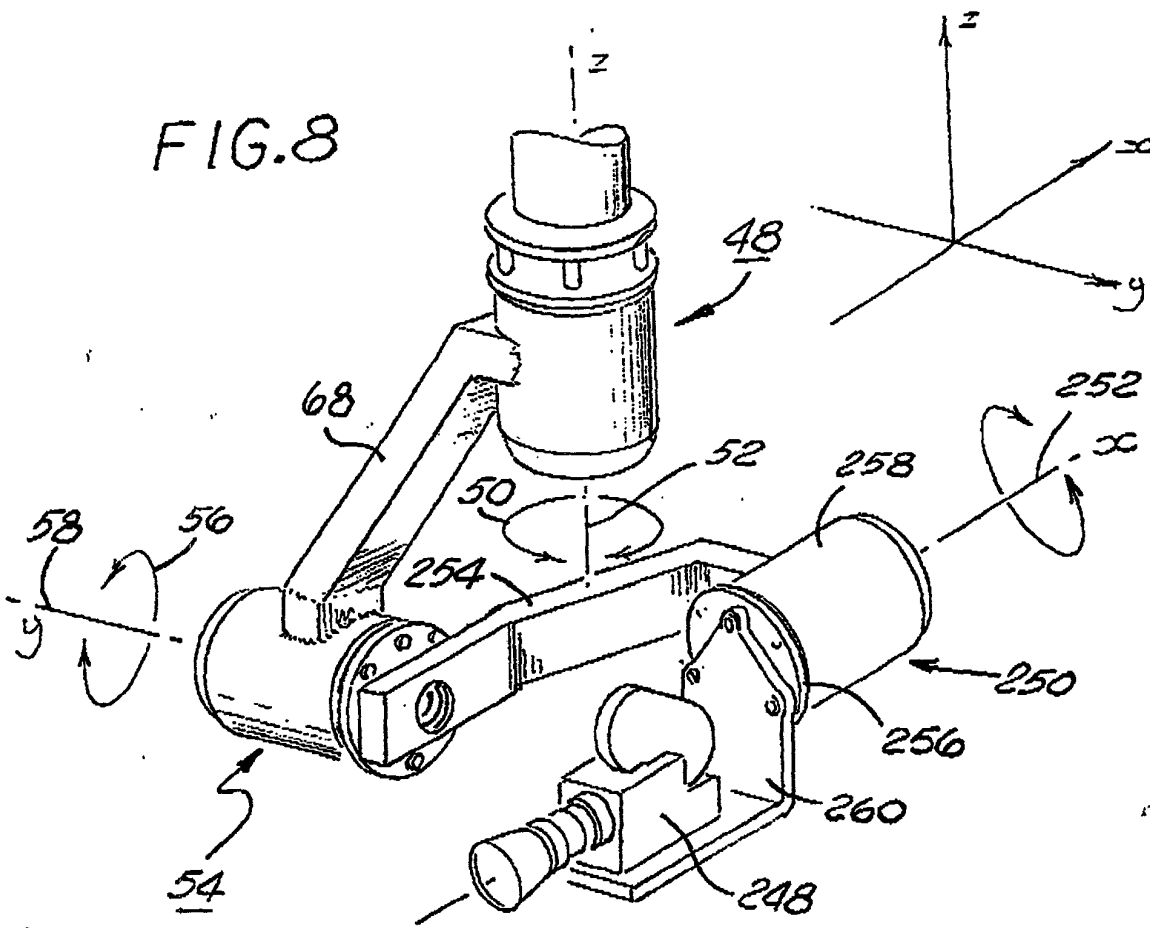


FIG.9

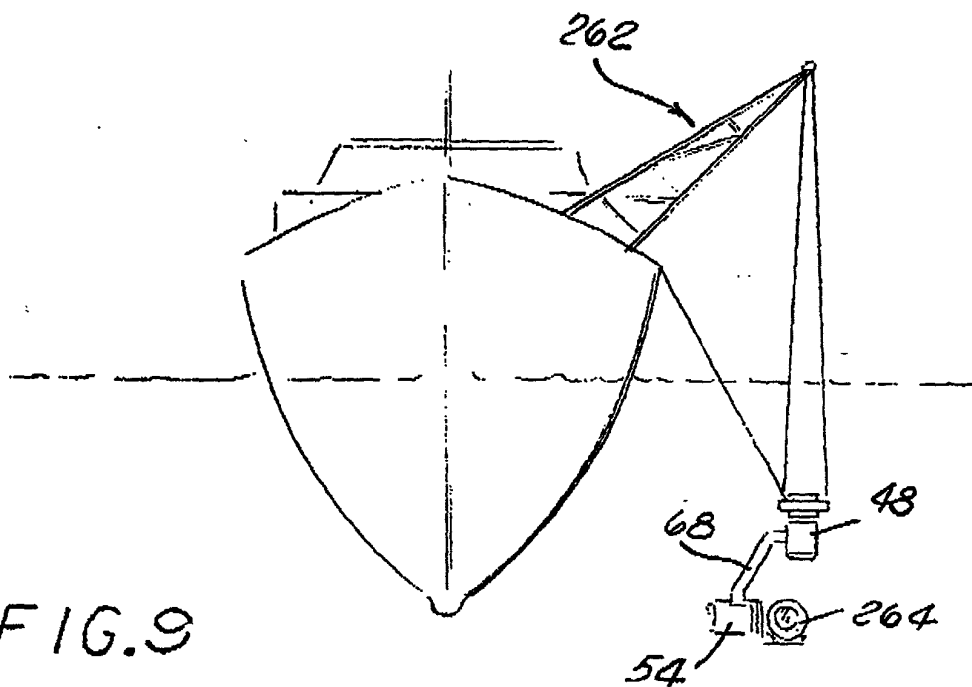

664290\*06468800

## COMBINED DECLARATION AND POWER OF ATTORNEY

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled REMOTE CAMERA POSITIONER for which is described and claimed in the specification attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: NONE

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, 1.56(a) which occurred between the filing of the prior application and the national or PCT international filing date of this application: NONE

661290"06162269



I hereby appoint ELLIOTT N. KRAMSKY, Registration No. 27,812, my attorney to conduct all business in the Patent and Trademark Office in connection with this application. Please send all correspondence to:

Elliott N. Kramsky, Esq.  
5850 Canoga Avenue  
Suite 400  
Woodland Hills, CA 91367  
(818) 992-5221

I hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.


Full name of Inventor

Richard A. Jones  
Name

United States of America  
Citizenship

5676 Penfield Ave.  
Woodland Hills, CA 91367  
P.O. Address and Residence

Date: 6-23-99

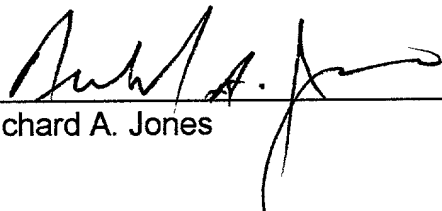  
Richard A. Jones

6541690 0016260